

## Vert-X 05E - 24V / 0.5 - 4.5V

### Application

- Access control systems
- Forklift

### Features


- High protection class IP68
- Flat design (5mm)
- Measuring system only 6mm from the edge. This enables the use with rotation centers close to a wall
- Select CW or CCW by Flip-assembly
- Non-contacting measuring method
- Very long life
- High accuracy of measurement
- Applications under adverse ambient conditions possible (humidity, dampness, dust, vibrations etc.)
- Full resolution and accuracy at programmed electrical angle
- Detection of magnetic loss (with safety flag)

Sensor principle		MH-C
<b>Electrical data</b>		
Measuring range	°	0 ... 360
Indep. linearity (typ.)	% of meas. range	±0.3
Max. hysteresis	°	0.1
Resolution	bit	12
Max. repeatability	°	0.1
Sample rate fast mode	kHz	(5)
Sample rate slow mode	kHz	1.66
System propagation delay fast mode	µs	(800)
System propagation delay slow mode	µs	4600
Max. temperature coefficient of the output signal	ppm/K	100
MTTFd / MTBF	years	240 / 240
Power supply voltage	VDC	8 ... 35
Current consumption without load (typ.) fast mode	mA	(19)
Current consumption without load (typ.) slow mode	mA	14
Min. ohmic load at output	kOhm	10
Max. capacitive load at output	nF	100
Reverse polarity protection of power supply		yes
Electrical connection		Wires (3x)
Cross section of single wires	mm <sup>2</sup>	0.5 (AWG20)
Redundancy feasible		yes
Electrical connection redundant		Wires (4x)
Cross section of single wires redundant	mm <sup>2</sup>	0.5 (AWG20)
<b>Mechanical data</b>		
Mechanical range	°	360 (continuous)
Protection class		IP68
Min. life	movements	no limitation
Operating & storage temperature	°C	-40 ... +125
EN 60068-2-6 Vibration (Amax = 0.75mm, f = 5...2000Hz)	g	20
EN 60068-2-27 Shock	g	50
<b>Standards</b>		
EN 55022 class B, Emission radiated (30...230MHz)	dB(µV/m)	max. 30
EN 55022 class B, Emission radiated (230...1000MHz)	dB(µV/m)	max. 37
EN 55022 class B, Emission conducted (0.15...0.5MHz)	dB(µV)	max. 56 ... 46
EN 55022 class B, Emission conducted (0.5...5MHz)	dB(µV)	max. 46
EN 55022 class B, Emission conducted (5...30MHz)	dB(µV)	max. 50
EN 61000-4-2, ESD (contact discharge / air discharge)	kV	±4 / ±8
EN 61000-4-3, Immision HF radiated (80...1000MHz/1.4...2.7GHz)	V/m	30
EN 61000-4-4, Burst (on all lines)	kV	±1
EN 61000-4-5, Surge (lines to ground)	kV	±1
EN 61000-4-6, Immision HF conducted (0.15...80MHz)	Vemk	10
EN 61000-4-8, Immision magnetic field (50Hz)	A/m	300
EN 60393-1 Insulation resistance (500VDC, 1bar, 2s)	GOhm	20
EN 60393-1 Dielectric strength (VAC, 50Hz, 1min, 1bar)	kV	1

Errors and omissions excepted. Subject to change without notice. State: 11.07.16

Contelec AG  
 Portstrasse 38  
 CH-2503 Biel/Bienne  
 Phone +41 (0)32 3665600  
 Telefax +41 (0)32 3665604  
 sales@contelec.ch

**CONTELEC**  
 A company of the Siedle-Group



**Vert-X 05E - 24V / 0.5 - 4.5V**  
**Ordering code**

Output characteristics		Electrical connection	
Positive gradient CW	Standard 1	2	Standard Wires 3pole
Positive gradient CCW	Optional 2	3	Optional Wires 4pole
Redundant, positive gradient CW	Optional 3	9	Optional Special wires
Redundant, positive gradient CCW	Optional 4		
Redundant, crossed signal curves	Optional 5		

Output signal		Length of wires	
0,5VDC ... 4,5VDC	Standard 2	02	Standard 20cm
		05	Optional 50cm
		99	Optional Special length

Power supply voltage	
24VDC	Standard 1

Vert-X **0 5 E 6** **7 3 6** **1 2 1** **2 0 2**

Electrical angle	
36	Standard Electrical angle 360°
xx	Optional 03 to 35 ; Declaration in 10° steps
99	Optional Special angle

Sensor principle	
7	MH-C


Mechanical version		
05E6	Standard	Magnetic actuator type 6
05E9	Optional	Special magnetic actuator

	MH-C
Custom magnetic actuator	X
Custom modification of the housing	X
Custom wires	X
Sample rate in fast mode	X
Special electrical angle within 30° to 360° (ex factory)	X
Extended operating range, axial (without safety flag)	X

**Options (on request)**

Errors and omissions excepted. Subject to change without notice. State: 11.07.16

Contelec AG  
 Portstrasse 38  
 CH-2503 Biel/Bienne  
 Phone +41 (0)32 3665600  
 Telefax +41 (0)32 3665604  
 sales@contelec.ch



Vert-X 05E6 xxx xxx 2xx  
Vert-X 05E6 xxx xxx 3xx

**Accessories (incl.)**

- None

**Operating range/Air gap (A)  
Standard with safety flag**



Single	0 ... 5.5mm
Redundant	0 ... 5.0mm

**Extended without safety flag  
(Optional)**

Single	0 ... 8.9mm
Redundant	0 ... 8.4mm

**Features Safety Flag**

- Detection of magnetic loss
- System shut-down in case of magnetic actuator out of valid operating range
- Recommended for safety relevant applications

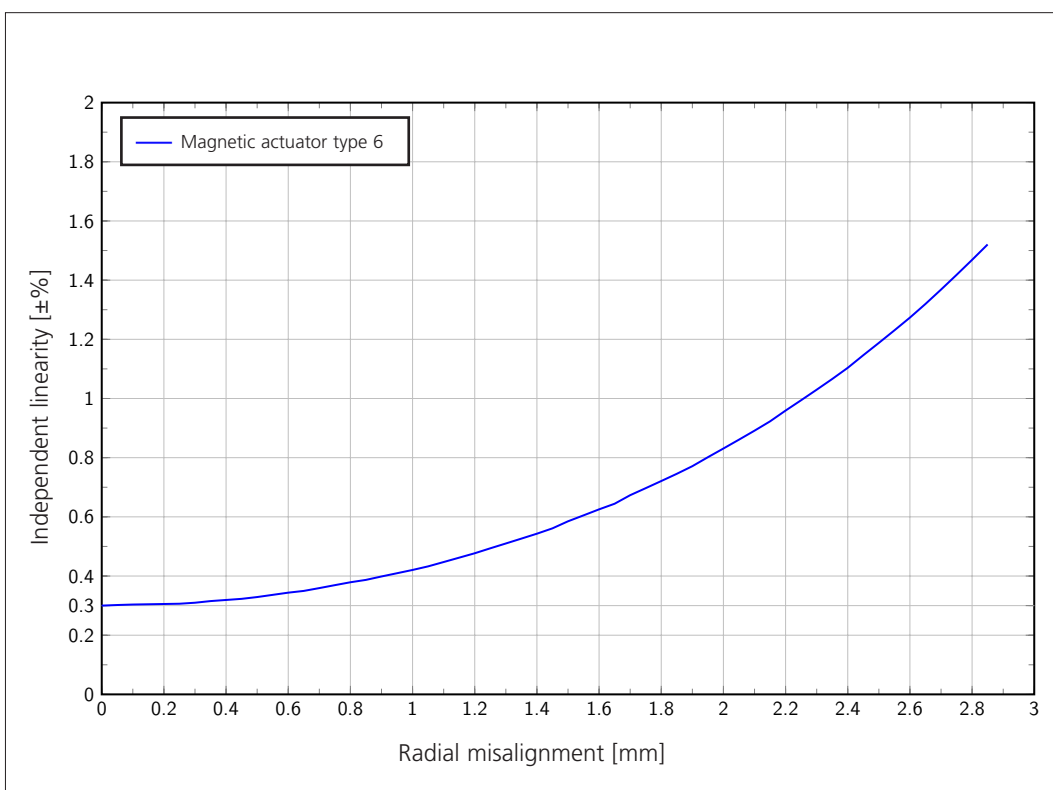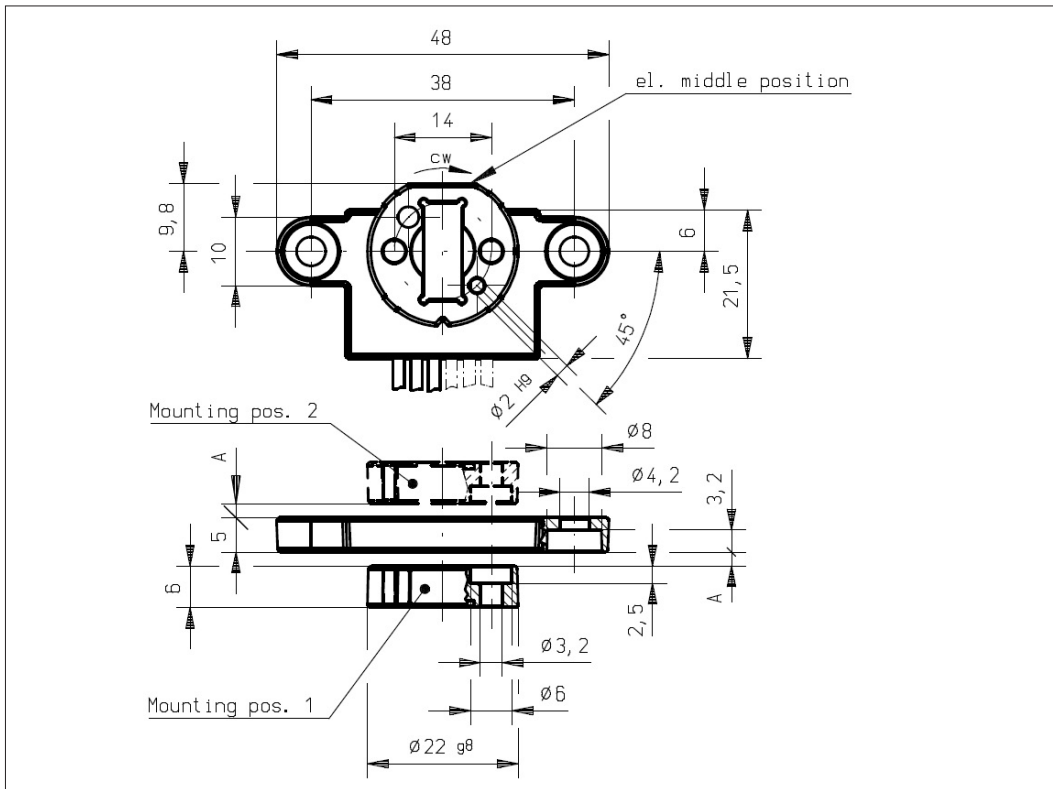

Vert-X 05E

**Indep. linearity with radial misalignment (@360°)**

Errors and omissions excepted. Subject to change without notice. State: 11.07.16

Contelec AG  
Portstrasse 38  
CH-2503 Biel/Bienne  
Phone +41 (0)32 3665600  
Telefax +41 (0)32 3665604  
sales@contelec.ch